Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description

created: 27.10.2021 / 01

article HK 1010 LX3 **Art-No.** 44998 **brand** SKA **weight/kg** 0.0043

remark For cup needle bearings the enveloping circle diameter Fw can only be checked in installed condition.


description

HK	Design
1010	Size

greasing

LX3	SHELL GADUS S3 V220C 2

dimensions and tolerances

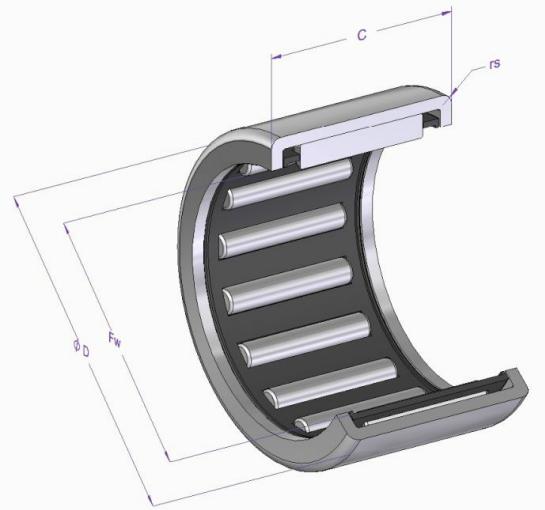

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
Fw	inner enveloping circle diameter	10	13 / 31	618
D	nominal outer diameter	14		618
C	width	10	0 / -300	618
rs min.	minimal chamfer dimension	0.4		618

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	4310	650	281	4840	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		16000	

operating temperature	max. [°C]	min. [°C]
	120	-20

material specification

description	material	DIN/ISO	hardness
Sleeve	Sheet steel		
Needle rollers	100Cr6	683-17	58-65
Cage	Sheet steel		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.