Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description


created: 19.02.2016 / 02 page: 1 / 1

article NUP 205 E TVP2 **Art-No.** 45710 **brand** SKA **weight/kg** 0.13

description

NUP	Design
205	Size
E	Reinforced version
TVP2	Plastic cage

dimensions and tolerances

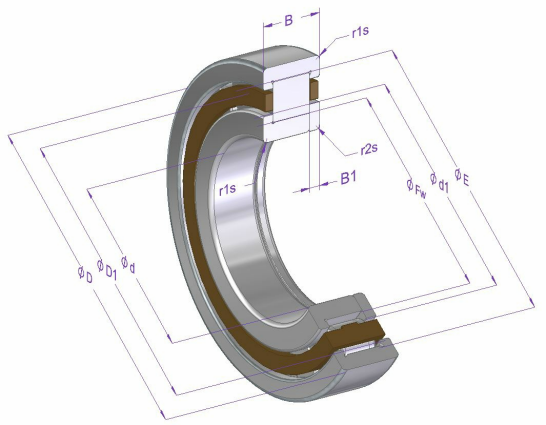

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	25	0 / -10	620-2
D	nominal outer diameter	52	0 / -13	620-2
B	width	15	0 / -120	620-2
Fw	inner enveloping circle diameter	31.5	0 / 15	5412-1
r1s min.	minimal chamfer dimension	1		5412-1
r2s min.	minimal chamfer dimension	0.6		5412-1
D1	outer shoulder diameter	~44		
d1	inner shoulder diameter	~35		

calculation and operating data

load ratings	**dynamic C [N]**	**fatique load limit load Cu [N]**		**DIN/ISO**	**static Co [N]**	**DIN/ISO**
	29300			281	27700	76
speed of rotation limit	**reference n [1/min]**	**grease n [1/min]**	**oil n [1/min]**			
		13000	15000			
operating temperature	**max. [°C]**	**min. [°C]**				
	120	-20				
bearing clearance	**radial min. [µm]**	**max. [µm]**				
	20	45				

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Cylindrical rollers	100Cr6	683-17	58-65
Cage	PA66 + GF25		
Support ring	100Cr6	683-17	58-65

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.