Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description

created: 29.04.2015 / 03

article 7212 B TVP 2RS NS7 **Art-No.** 46044 **brand** SKA **weight/kg** 0.82


description

7212	Size
B	Pressure angle
TVP	Plastic cage
2RS	Sealing washers on both sides, touching

greasing

NS7	KYODO YUSHI MULTEMP SRL

dimensions and tolerances

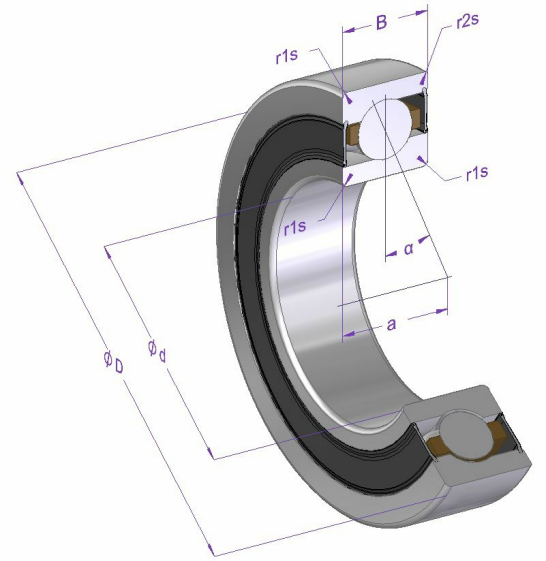

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	60	0 / -15	620-2
D	nominal outer diameter	110	0 / -15	620-2
B	width	22	0 / -150	620-2
r1s min.	minimal chamfer dimension	1.5		628-1
rs2 min.	minimal chamfer dimension	1		628-1
alpha	contact angle	40°		628-1
a	load application point	~46.6		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	42400		281	37600	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		4800	

operating temperature	max. [°C]	min. [°C]
	120	-20

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-65
Cage	PA66		
Sealing washers	Sheet steel/NBR		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.