general data/description

created: 29.08.2017 / 03 page: 1 / 2


article NKS 30 P6 **Art-No.** 46107 **brand** SKA **weight/kg** 0.104

remark Load ratings and rotational speed also depending on mating track.

description

NKS	Design
30	Size
P6	Accuracy class

dimensions and tolerances

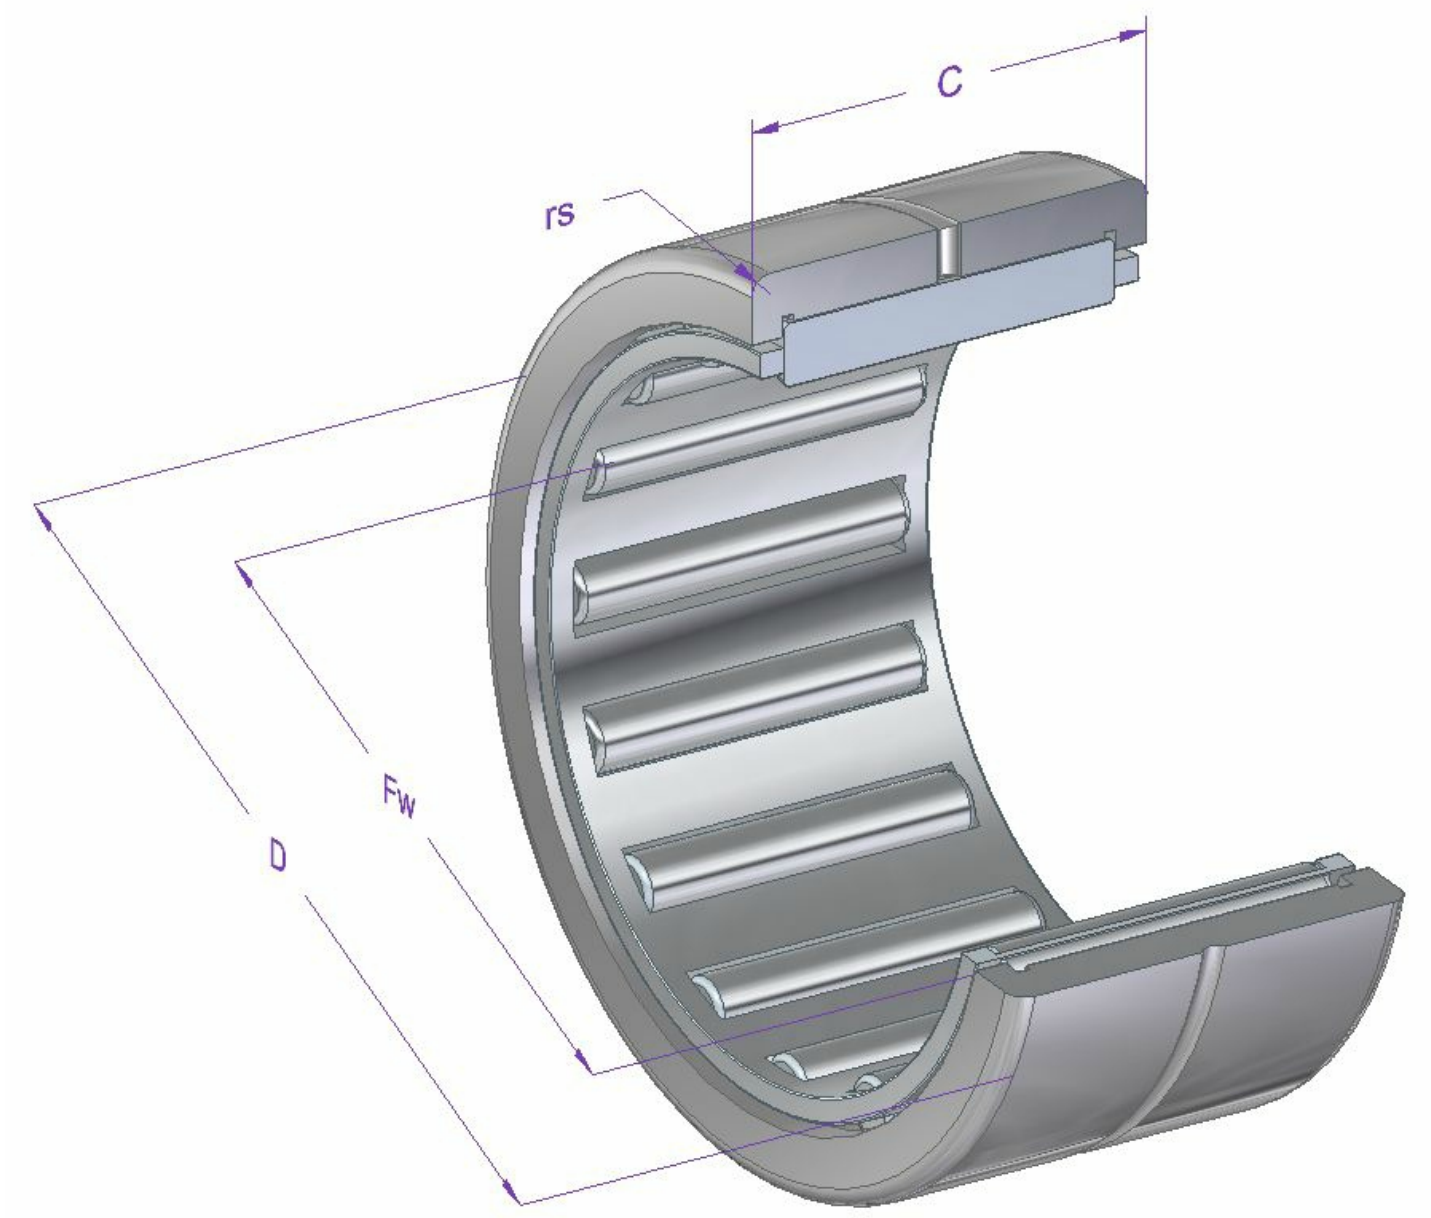

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
Fw	inner enveloping circle diameter	30	20 / 33	
D	nominal outer diameter	45	0 / -9	620-2
C	width	22	0 / -120	620-2
rs min.	minimal chamfer dimension	0.6		

Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

article NKS 30 P6 **Art-No.** 46107

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	33500	5000	281	41600	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		8000	12000

operating temperature	max. [°C]	min. [°C]
	120	-20

material specification

description	material	DIN/ISO	hardness
Outer ring	100Cr6	683-17	58-65
Needle rollers	100Cr6	683-17	58-65
Cage	Sheet steel		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.