general data/description


created: 21.08.2015 / 05 page: 1 / 2

article NUP 207 E TVP2 HQS C3 **Art-No.** 46405 **brand** SKA **weight/kg** 0.30

description

NUP	Design
207	Size
E	Reinforced version
TVP2	Plastic cage
HQS	Material
C3	Internal clearance

dimensions and tolerances

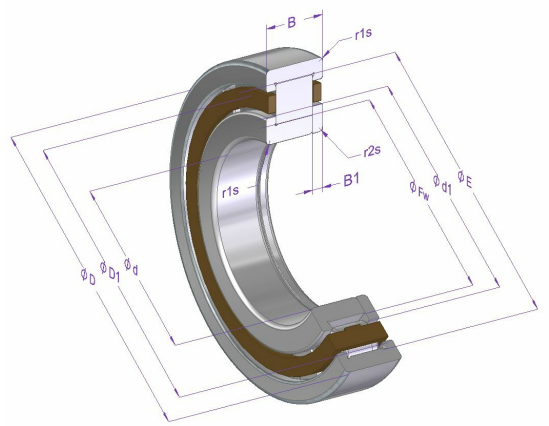

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	35	0 / -12	620-2
D	nominal outer diameter	72	0 / -13	620-2
B	width	17	0 / -120	620-2
Fw	inner enveloping circle diameter	44	0 / 15	5412-1
r1s min.	minimal chamfer dimension	1.1		5412-1
r2s min.	minimal chamfer dimension	0.6		5412-1
D1	outer shoulder diameter	60.5		
d1	inner shoulder diameter	~ 48		
C3	internal clearance	0.045 / 0.070		620-4
B1	flange width	3		
E	raceway diameter outer ring	64		5412-1

calculation and operating data

load ratings	**dynamic C [N]**	**fatique load limit load Cu [N]**		**DIN/ISO**	**static Co [N]**	**DIN/ISO**
	49100	6000		281	48900	76
speed of rotation limit	**reference n [1/min]**	**grease n [1/min]**	**oil n [1/min]**			
		8500	10000			
operating temperature	**max. [°C]**	**min. [°C]**				
	120	-20				
bearing clearance	**radial min. [µm]**	**max. [µm]**				
	45	70				

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Cylindrical rollers	100Cr6	683-17	58-65
Cage	PA66 + GF25		
Flange disc	100Cr6	683-17	58-65

Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

article NUP 207 E TVP2 HQS C3 **Art-No.** 46405

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.