Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description

article GE 35 KRRB HA2 **Art-No.** 46542 **brand** SKA **weight/kg** 0.55

remark Rotational speed is reference value for shaft tolerance h7. Also depending on load and seal.


description

GE	Design
35	Size
KRRB	Seals

greasing

HA2	HANGU2#, GREAT WALL MOTOR BEARING GREASE

dimensions and tolerances

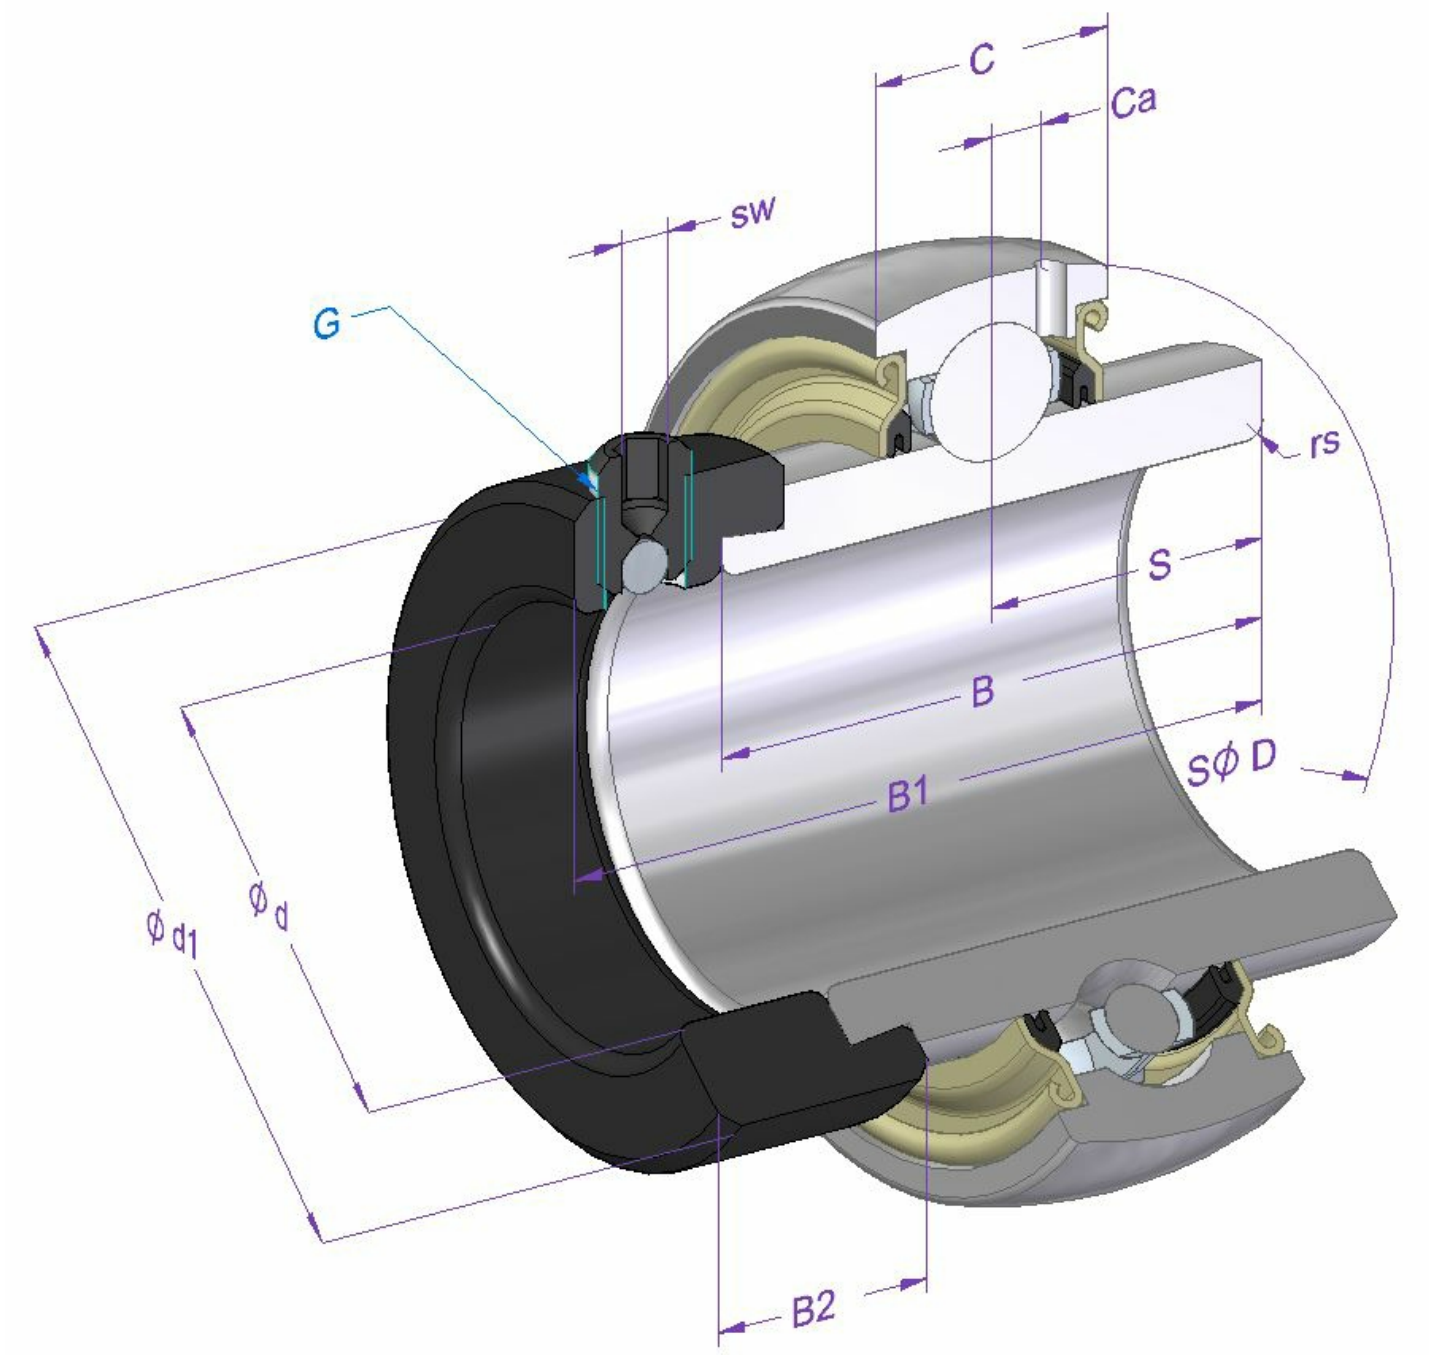

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	35	0 / 21	626-1
D	nominal outer diameter	72	0 / -13	620-2
B	inner ring width	37.7	0 / -120	626-1
C	outer ring width	19	0 / -120	626-1
d1 max.	clamping ring outer diameter	55.6	0 / -210	626-1
B1	total width	51.1		626-1

article GE 35 KRRB HA2 **Art-No.** 46542

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
B2	clamping ring width	17.5		626-1
Ca	distance lubrication hole	5.7		626-1
S	swing axle distance	18.8		626-1
G	thread	M10x1.25		
sw	wrench size	5		
rs min.	minimal chamfer dimension	1.5		

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	25500	790	281	15300	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		3000	

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	radial min. [µm]	max. [µm]
	15	33

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-65
Cage	Sheet steel		
Seals	Sheet steel/NBR		
Clamping ring	C45		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.