general data/description

created: 07.12.2018 / 01 page: 1 / 2

article 7207 B TVP DB NS7 **Art-No.** 49143 **brand** SKA **weight/kg** 0.59


description

7207	Size
B	Pressure angle
TVP	Plastic cage
DB	Layout


greasing

NS7	KYODO YUSHI MULTEMP SRL

dimensions and tolerances

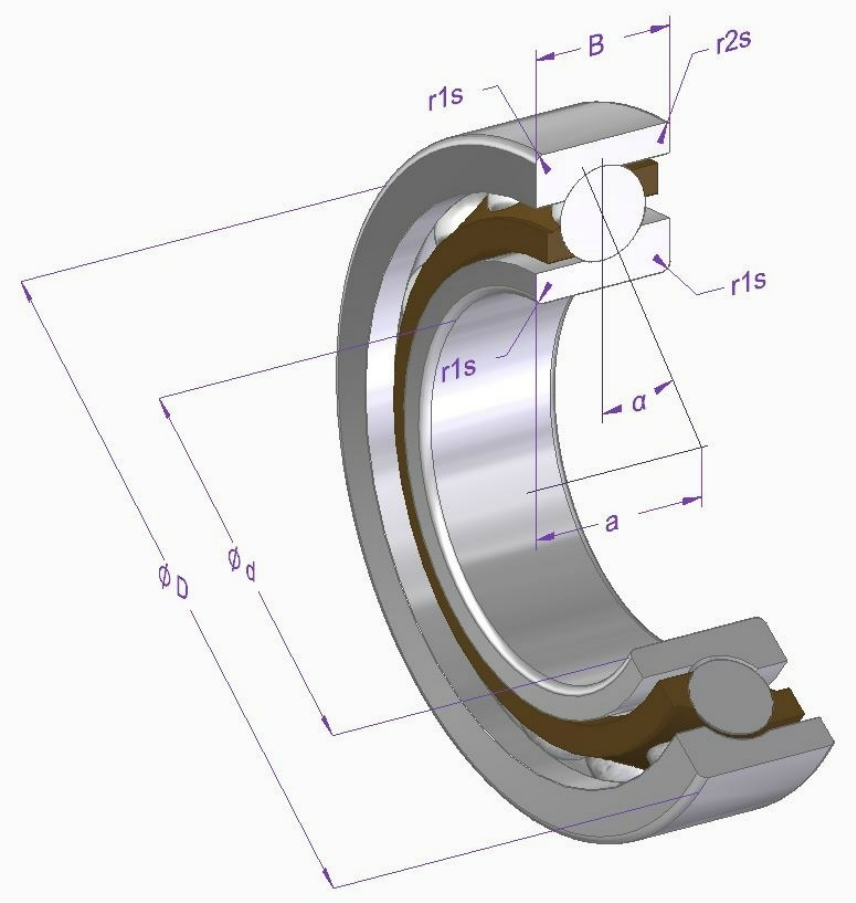

DB

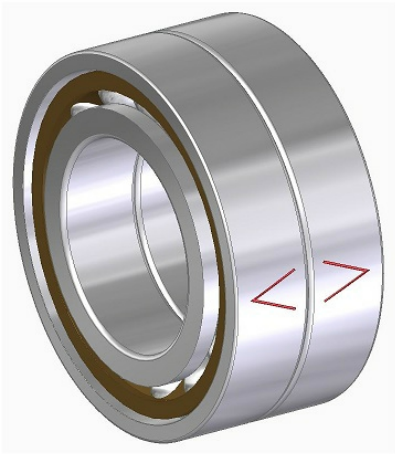

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	35	0 / -10	620-2
D	nominal outer diameter	62	0 / -11	620-2
B	width	17	0 / -120	620-2
r1s min.	minimal chamfer dimension	1.1		628-1
r2s min.	minimal chamfer dimension	0.6		628-1
a	load application point	~30.9		
alpha	contact angle	40°		628-1

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	27100	950	281	18400	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		7500	10000

operating temperature	max. [°C]	min. [°C]
	120	-20

article 7207 B TVP DB NS7 **Art-No.** 49143

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-65
Cage	PA66+GF25		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.