## general data/description

created: 20.08.2018 / 02 page: 1 / 2

**article** F 693 ZZ INOX NS7 **Art-No.** 49812 **brand** SKA **weight/kg** 0.001


**description**

| | |
|---|---|
| F | Design |
| 693 | Size |
| ZZ | Shields on both sides, not touching |
| INOX | Stainless steel |

**greasing**

| | |
|---|---|
| NS7 | KYODO YUSHI MULTEMP SRL |

## dimensions and tolerances

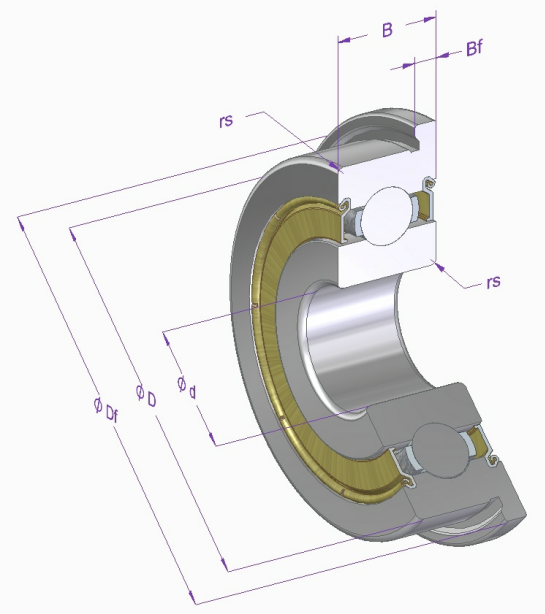


| dimension | Description | [mm] | tolerance [µm] | DIN/ISO |
|---|---|---|---|---|
| d | nominal inner diameter | 3 | 0 / -8 | 620-2 |
| D | nominal outer diameter | 8 | 0 / -8 | 620-2 |
| Df | flange diameter | 9.5 | 0 / -36 | ISO 492 |
| B | width | 4 | 0 / -120 | 620-2 |
| Bf | flange width | 0.9 | 0 / -50 | WERKSNORM |
| rs min. | minimal chamfer dimension | 0.15 | | 625-4 |

## calculation and operating data

| load ratings | dynamic C [N] | fatique load limit load Cu [N] | DIN/ISO | static Co [N] | DIN/ISO |
|---|---|---|---|---|---|
| | 475 | | | 144 | |

| speed of rotation limit | reference n [1/min] | grease n [1/min] | oil n [1/min] |
|---|---|---|---|
| | | 60000 | |

| operating temperature | max. [°C] | min. [°C] |
|---|---|---|
| | 120 | -20 |

| bearing clearance | radial min. [µm] | max. [µm] |
|---|---|---|
| | 2 | 13 |

## material specification

| description | material | DIN/ISO | hardness |
|---|---|---|---|
| Inner ring | X95Cr18 | | |
| Outer ring | X95Cr18 | | |
| Balls | X95Cr18 | | |
| Cage | Sheet steel INOX | | |
| Shields | Sheet steel INOX | | |

**Hans Saurer Kugellager AG**
**Niederfeld 38**
**CH-9320 Stachen**



**article** F 693 ZZ INOX NS7 **Art-No.** 49812

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.