Hans Saurer Kugellager AG
Niederfeld 38
CH-9320 Stachen

data sheet

general data/description

created: 07.01.2020 / 03 page: 1 / 1


article 3212 B TN **Art-No.** 50832 **brand** SKA **weight/kg** 1.18

remark Y-factors: Y1: Fa/Fr <= e / Y2: Fa/Fr > e.

description

3212	Size
B	Pressure angle
TN	Plastic cage

dimensions and tolerances

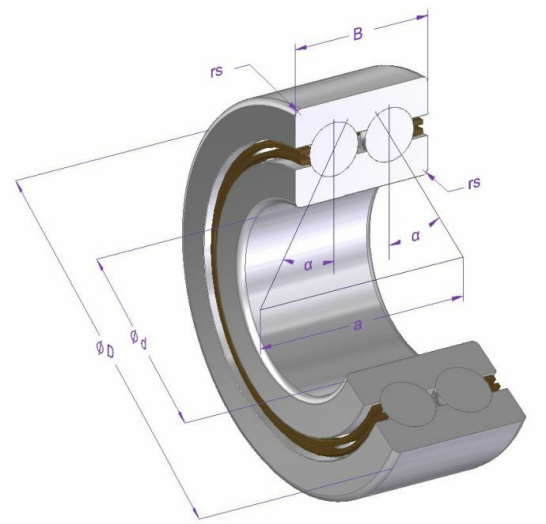

dimension	Description	[mm]	tolerance [µm]	DIN/ISO
d	nominal inner diameter	60	0 / -15	620-2
D	nominal outer diameter	110	0 / -15	620-2
B	width	36.5	0 / -150	620-2
rs min.	minimal chamfer dimension	1.5		628-3
a	load application point	~64.3		
alpha	contact angle	30°		628-3
e	calculation factor	0.8		281
Y1	calculation factor	0.78		281
Y2	calculation factor	1.24		281
Y0	calculation factor	0.66		76
X	calculation factor	0.63		281

calculation and operating data

load ratings	dynamic C [N]	fatique load limit load Cu [N]	DIN/ISO	static Co [N]	DIN/ISO
	66900	3090	281	59400	76

speed of rotation limit	reference n [1/min]	grease n [1/min]	oil n [1/min]
		3800	5000

operating temperature	max. [°C]	min. [°C]
	120	-20

bearing clearance	axial min. [µm]	max. [µm]
	13	36

material specification

description	material	DIN/ISO	hardness
Inner ring	100Cr6	683-17	58-65
Outer ring	100Cr6	683-17	58-65
Balls	100Cr6	683-17	58-66
Cage	PA66+GF25		

All information in this document was provided and checked carefully. Nevertheless, we can not assume any liability for incomplete or faulty information.